


MA Series

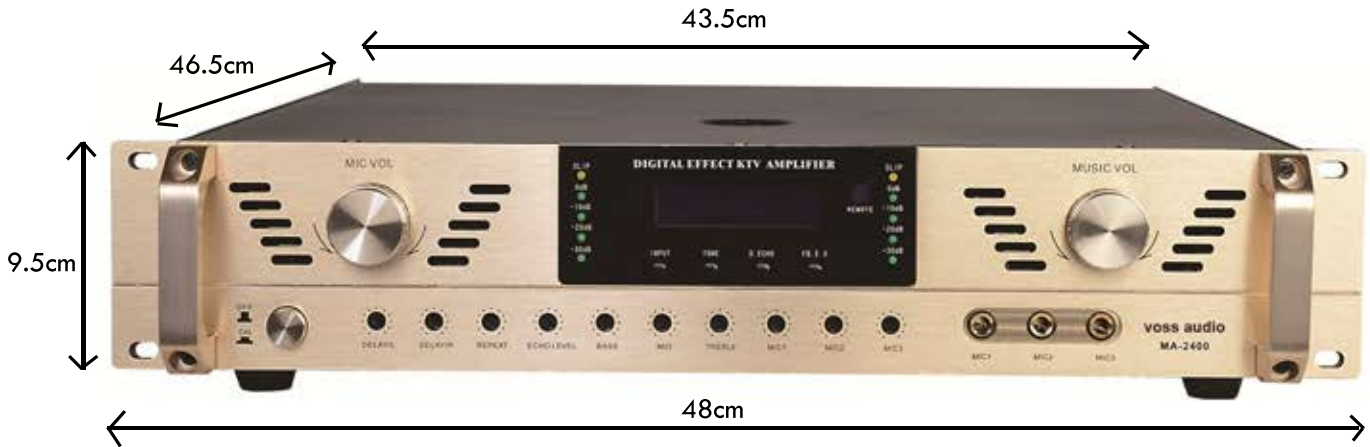

Standard 2U case, Popular Gold panel, splendid and noble design
 Electronic volume control. Easy operation, long service life
 Analog circuit, restore the sound
 Use 2 professional reverb chips, switch single/double reverberation at will
 Professional DSP digital prevent squeal module, make sound quality softer and deeper
 The microphone with high/mid/low tone control circuit
 With Subwoofer output function, frequency can be adjusted. Choose "HIGH CUT" function on the back panel, then you can connect 2 pcs 12 inch subwoofer; Or choose "BIRDGE" function, you can connect 18 inch subwoofer.
 Two Class H circuit, highly efficient heat dissipating structure.
 Intelligent cooling fan system, the wind speeds up with the rise of temperature. When the temperature of radiator bellows 45°, fan does not work.
 Limit the maximum, with auto-save feature

Technical parameters

Model:	MA-2400	MA-2600
Output power:	8R/450*W 4R/650*2	8R/600*W 4R/900*2
SNR:	≥90dB	≥90dB
THD:	≤0.05%	≤0.05%
Impedance:	20KΩ	20KΩ
Damping Factor:	≥200/8Ω	≥200/8Ω
Frequency response:	20Hz-20KHz(+0dB-0.5dB.1kHz)	20Hz-20KHz(+0dB-0.5dB.1kHz)
Channel resolution:	>70dB	>70dB
Dimension:	480*510*91	480*510*91
Gross weight:	16KG	16KG